

**MYERS & ASSOCIATES
ARCHITECTURE, AIA, P.A.
AA-0003461**

ARCHITECTURE • PLANNING • INTERIOR ARCHITECTURE • LANDSCAPE DESIGN • ARBORICULTURE

9170 Oakhurst Rd., Suite 3B
Seminole, Florida 33776

ADDENDUM #1

DATE: July 24, 2008
TO: Terry Falke
RE: Pasco County Fire Stations Hardening Phase II

PLEASE NOTE THE FOLLOWING:

1.0 Reference Drawing

Garage doors – Shall be Clopay series 524 insulated for heights of doors shown. This is shown on Florida Product Approvals on sheet A-1.

2.0 Reference Drawing

Painting:

Refer to painting schedule below – All new unfinished work must be painting as follows. Paint specification is based on Porter Paint.

EXTERIOR STUCCO SUBSTRATES

PRETREATMENT - All surfaces to be painted shall be free of dust, dirt or other foreign matter prior to painting.

PRETREATMENT – Efflorescence on any area that is scheduled to be painted shall be scrubbed off with a mixture of commercial Muriatic Acid to five parts water and then rinsed with clear water and allow surface to dry thoroughly before painting.

PRETREATMENT – Allow 14 days cure time prior to any coating being applied. Moisture content should be below 15% prior to any coating application.

	<u>*THEO. SPREAD RATE</u>	<u>THEO. WET FILM THICKNESS</u>	<u>*THEO. DRY FILM THICKNESS</u>
FIRST COAT – Porter #6015 Porterlock WB Acrylic Clear Sealer or Porter #6010 Porterlock WB Acrylic Pigmented Sealer.	200-400	N/A	N/A
SECOND COAT – Porter #519 Acri-Shield Float Exterior Acrylic Paint.	200-300	4.0	1.5
THIRD COAT – Porter #519 Acri-Shield Flat Exterior Acrylic Paint.	200-300	4.0	<u>1.5</u>
TOTAL SYSTEM DRY FILM THICKNESS			3.0 MILS

*ALLOW FOR APPLICATION, SURFACE TEXTURE AND POROSITY LOSSES.

INTERIOR DRYWALL WALLS

	<u>*THEO. SPREAD RATE</u>	<u>THEO. WET FILM THICKNESS</u>	<u>*THEO. DRY FILM THICKNESS</u>
PRETREATMENT – All surfaces To be painted shall be free of dust, dirt, or other foreign matter prior to painting.			
PRETREATMENT – Fill all minor Irregularities with Spackling Com- pound and sand to a level surface.			
FIRST COAT – Porter #867 Pro-Master 2000 Interior Latex Primer/Sealer.	400	4.0	1.1
SECOND COAT – Porter #389 Hi-Hide Eggshell Interior Latex Wall and Trim Paint.	400	4.0	1.3
THIRD COAT – Paint #389	400	4.0	<u>1.3</u>


Hi-Hide Eggshell Interior Latex
Wall and Trim Paint.

TOTAL SYSTEM DRY FILM THICKNESS

3.7 MILS

*ALLOW FOR APPLICATION, SURFACE TEXTURE AND POROSITY LOSSES.

Sincerely,

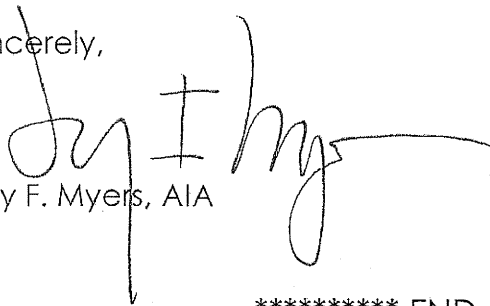

Jay F. Myers, AIA

***** END OF ADDENDUM #1 *****

Phone: 727-595-7100 Fax: 727-595-7138 E-mail: myersarch@ix.netcom.com

